



# Charge Carts

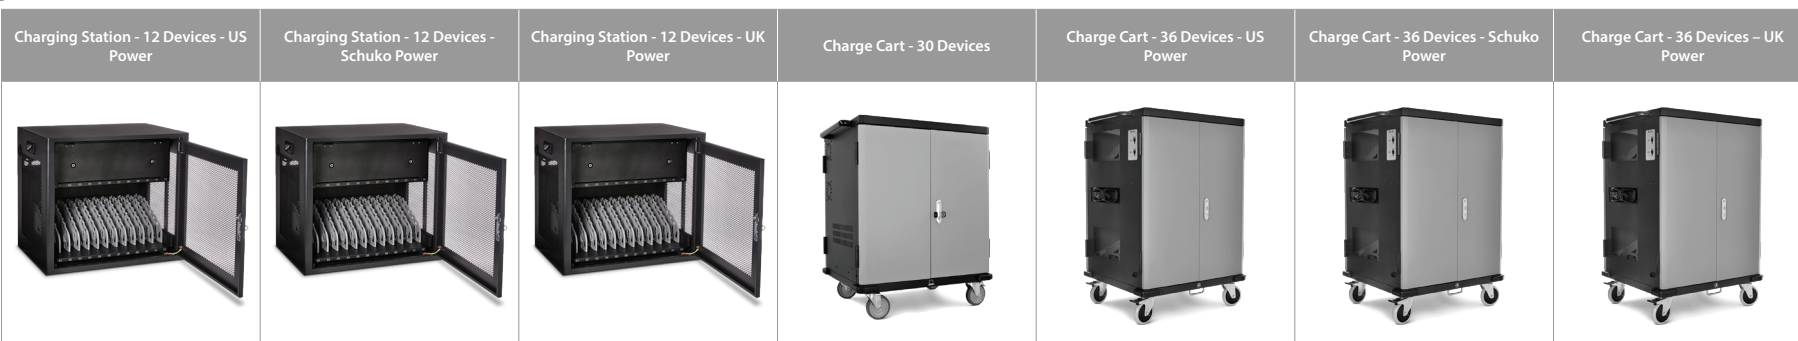

	Charging Station - 12 Devices - US Power	Charging Station - 12 Devices - Schuko Power	Charging Station - 12 Devices - UK Power	Charge Cart - 30 Devices	Charge Cart - 36 Devices - US Power	Charge Cart - 36 Devices - Schuko Power	Charge Cart - 36 Devices - UK Power
MODEL	CHGSTA12-1N	CHGSTA12-1E	CHGSTA12-1K	CHGCT30-1N	CHGCT36-1N	CHGCT36-1E	CHGCT36-1K
SKU	5RU488	J154580	J154581	8X4184	3BG420	J154274	J154275
EAN	662919104905	662919104912	662919104929	662919096088	662919101140	662919101157	662919101164
Numbered device spaces	12	12	12	30	36	36	36
Device Slot Dimensions	13.74 x 1.38 x 10.7 in (349 x 35 x 272 mm)	13.74 x 1.38 x 10.7 in (349 x 35 x 272 mm)	13.74 x 1.38 x 10.7 in (349 x 35 x 272 mm)	15 x 1.34 x 12.5 in (381 x 34 x 319 mm)	15 x 1.42 x 10.24 in (381 x 36 x 260 mm)	15 x 1.42 x 10.24 in (381 x 36 x 260 mm)	15 x 1.42 x 10.24 in (381 x 36 x 260 mm)
Organization and convenience	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two handles	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two handles	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two handles	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two push handles, Secure compartment with 1U of 19" rack mount space, 2 Auxiliary external power outlets	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two push handles	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two push handles	Fully assembled for rapid deployment, Flexible device dividers with cable channels and numbered device slots on sliding shelves, numbered power adapter slots with cable management, two push handles
Charging System	Power Distribution Unit (PDU)	Power Distribution Unit (PDU)	Power Distribution Unit (PDU)	Automated Timer Round Robin	Automated Timer Round Robin	Automated Timer Round Robin	Automated Timer Round Robin
Fully Assembled	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Power adapter slot dimensions	1.58 x 11.93 in (40 x 303 mm)	1.58 x 11.93 in (40 x 303 mm)	1.58 x 11.93 in (40 x 303 mm)	3.5 x 1.5 x 7.9 in (89 x 40 x 200 mm)	3.5 x 1.5 x 7.9 in (89 x 40 x 200 mm)	3.5 x 1.5 x 7.9 in (89 x 40 x 200 mm)	3.5 x 1.5 x 7.9 in (89 x 40 x 200 mm)
Casters Included	Optional	Optional	Optional	Yes, preinstalled	Yes, preinstalled	Yes, preinstalled	Yes, preinstalled
Package Includes	Charging Station, 6 ft (1.83 m) Power Cord, Wall Mount Bracket, User manual	Charging Station, 6 ft (1.83 m) Power Cord, Wall Mount Bracket, User manual	Charging Station, 6 ft (1.83 m) Power Cord, Wall Mount Bracket, User manual	charge cart, manual, keys, 4 sets rack mount hardware M6 (screws/ cage nuts)	Charging Cart, 6 ft (1.83 m) US Power Cord, Manual	Charging Cart, 6 ft (1.83 m) Power Cord, Manual	Charging Cart, 6 ft (1.83 m) Power Cord, Manual
AC Cord length	6 ft (1.83 m)	6 ft (1.83 m)	6 ft (1.83 m)	6 ft (1.83 m)	6 ft (1.83 m)	6 ft (1.83 m)	6 ft (1.83 m)
Color	Black	Black	Black	Black	Black	Black	Black
Accent Color	—	—	—	Gray	Gray	Gray	Gray
Material	High-grade 18 gauge cold rolled steel	High-grade 18 gauge cold rolled steel	High-grade 18 gauge cold rolled steel	High grade cold rolled steel	High-grade 18 gauge cold rolled steel	High-grade 18 gauge cold rolled steel	High-grade 18 gauge cold rolled steel
Product Dim (L/W/H)	24.02 x 16.93 x 20.67 in (610 x 430 x 525 mm)	24.02 x 16.93 x 20.67 in (610 x 430 x 525 mm)	24.02 x 16.93 x 20.67 in (610 x 430 x 525 mm)	25.71 x 31.34 x 39.09 in (653 x 796 x 993 mm)	31.89 x 25.67 x 42.52 in (810 x 652 x 1080 mm)	31.89 x 25.67 x 42.52 in (810 x 652 x 1080 mm)	31.89 x 25.67 x 42.52 in (810 x 652 x 1080 mm)
Package Dim (L/W/H)	26.38 x 19.29 x 23.03 in (670 x 490 x 585 mm)	26.38 x 19.29 x 23.03 in (670 x 490 x 585 mm)	26.38 x 19.29 x 23.03 in (670 x 490 x 585 mm)	35.43 x 28.07 x 45.08 in (900 x 713 x 1145 mm)	33.27 x 29.61 x 50.08 in (845 x 752 x 1272 mm)	33.27 x 29.61 x 50.08 in (845 x 752 x 1272 mm)	33.27 x 29.61 x 50.08 in (845 x 752 x 1272 mm)
Operating Temperature	-10°C to 40°C	-10°C to 40°C	-10°C to 40°C	-10°C to 40°C	-10°C to 40°C	-10°C to 40°C	-10°C to 40°C
Operating Humidity	20% to 80% RH	20% to 80% RH	20% to 80% RH	20% to 80% RH	20% to 80% RH	20% to 80% RH	20% to 80% RH
Storage Temperature	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C
Storage Humidity	20% to 90% RH	20% to 90% RH	20% to 90% RH	20% to 90% RH	20% to 90% RH	20% to 90% RH	20% to 90% RH

# Charge Carts Accessories

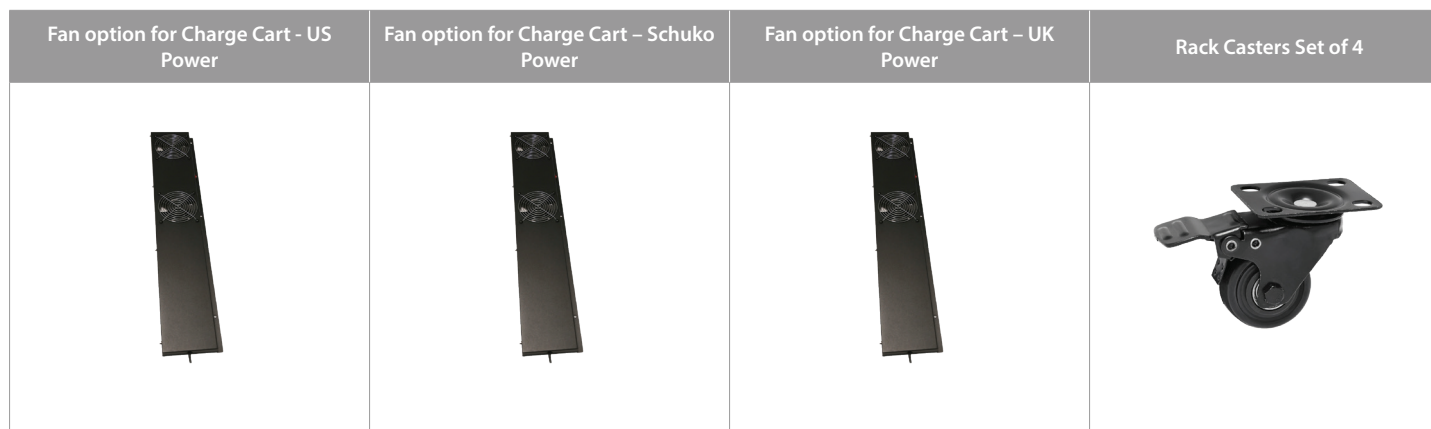

<b>MODEL</b>	CHGCTFAN-1N	CHGCTFAN-1E	CHGCTFAN-1K	RM4CASTERS-1N
<b>SKU</b>	5DZ388	J154447	J154448	5RU494
<b>EAN</b>	662919103076	662919103083	662919103090	662919104868
<b>Fully Assembled</b>	Yes	Yes	Yes	Yes
<b>Package Includes</b>	Fan kit, Mounting hardware, User manual	Fan kit, Mounting hardware, User manual	Fan kit, Mounting hardware, User manual	2 inch castors (4), M5x12 tapping screws (16)
<b>AC Cord length</b>				NA
<b>Color</b>	Black	Black	Black	NA
<b>Material</b>	High-grade 18 gauge cold rolled steel	High-grade 18 gauge cold rolled steel	High-grade 18 gauge cold rolled steel	Steel, Rubber
<b>Product Dim (L/W/H)</b>	6.1 x 1.18 x 29.84 in (155 x 30 x 758 mm)	6.1 x 1.18 x 29.84 in (155 x 30 x 758 mm)	6.1 x 1.18 x 29.84 in (155 x 30 x 758 mm)	4.72 x 1.97 x 3.15 in (120 x 50 x 80 mm)
<b>Package Dim (L/W/H)</b>	30.71 x 6.69 x 1.97 in (780 x 170 x 50 mm)	30.71 x 6.69 x 1.97 in (780 x 170 x 50 mm)	30.71 x 6.69 x 1.97 in (780 x 170 x 50 mm)	8.66 x 4.72 x 7.09 in (220 x 120 x 180 mm)
<b>Operating Temperature</b>	-10°C to 40°C	-10°C to 40°C	-10°C to 40°C	NA
<b>Operating Humidity</b>	20% to 80% RH	20% to 80% RH	20% to 80% RH	NA
<b>Storage Temperature</b>	-40°C to +60°C	-40°C to +60°C	-40°C to +60°C	NA
<b>Storage Humidity</b>	20% to 90% RH	20% to 90% RH	20% to 90% RH	NA